


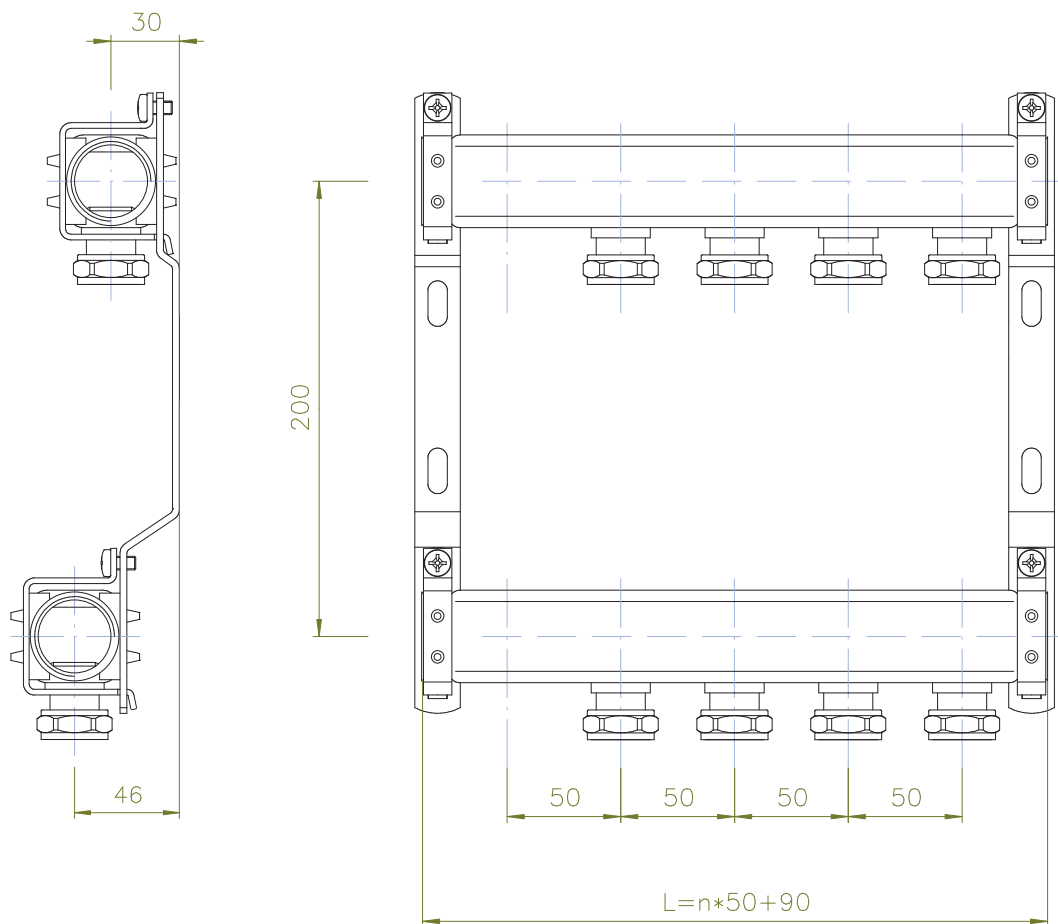
# Manifold for radiators VA-DZP

for attached valves



Specifications		Circuits	Type	Length	Item No.	
	<b>Manifold:</b>		2	VA-DZP 2	190 mm	2702
	<b>Dimension</b>	Stainless steel AISI 304	3	VA-DZP 3	240 mm	2703
	<b>Connections:</b>	DN32 stainless steel profile, 1330 mm <sup>2</sup> cross-sectional area	4	VA-DZP 4	290 mm	2704
	<b>Supply:</b>	1" female threads on both sides	5	VA-DZP 5	340 mm	2705
	<b>Return:</b>	Screw part with rotatable 3/4" connecting nut, conical sealing	6	VA-DZP 6	390 mm	2706
	<b>Connections:</b>	Screw part with rotatable 3/4" connecting nut, conical sealing	7	VA-DZP 7	440 mm	2707
	<b>Connections:</b>	Center distance 50 mm	8	VA-DZP 8	490 mm	2708
	<b>Pressure stage/ system:</b>	PN16 for heating systems with water quality according to VDI 2035	9	VA-DZP 9	540 mm	2709
			10	VA-DZP 10	590 mm	2710
			11	VA-DZP 11	640 mm	2711
			12	VA-DZP 12	690 mm	2712
			13	VA-DZP 13	740 mm	2713

**Delivery:** Stainless steel manifold packages include supply manifold and return manifold, each with two 1/2" outlet connections with female threads for air vents and fill/drain valves. The manifold is assembled in noise reducing brackets. Delivered in a box with stickers.



L = Length of manifold n = Number of circuits