
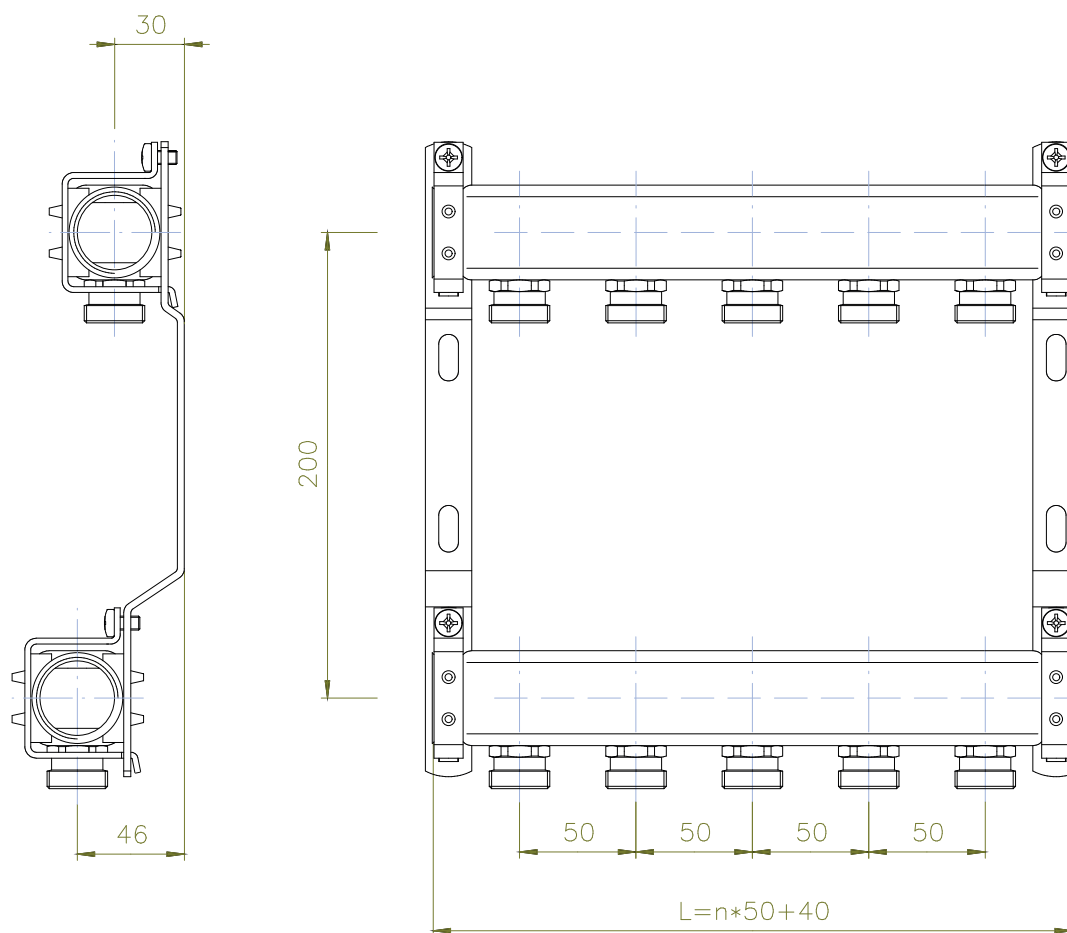


Manifold for radiators VA-HK with Eurocone connections



Specifications		Circuits	Type	Length	Item No.
		2	VA-HK 2	140 mm	2902
		3	VA-HK 3	190 mm	2903
		4	VA-HK 4	240 mm	2904
		5	VA-HK 5	290 mm	2905
		6	VA-HK 6	340 mm	2906
		7	VA-HK 7	390 mm	2907
		8	VA-HK 8	440 mm	2908
		9	VA-HK 9	490 mm	2909
		10	VA-HK 10	540 mm	2910
		11	VA-HK 11	590 mm	2911
		12	VA-HK 12	640 mm	2912
		13	VA-HK 13	690 mm	2913
		14	VA-HK 14	740 mm	2914
		Manifold:	Stainless steel AISI 304		
Dimension	DN32 stainless steel profile, 1330 mm ² cross-sectional area				
Connections:	1" female threads on both sides				
Supply:	Supply: 3/4" male Eurocone				
Return:	Supply: 3/4" male Eurocone				
Connections:	Center distance 50 mm				
Pressure stage/ system:	PN16 for heating systems with water quality according to VDI 2035				

Delivery: Stainless steel manifold packages for underfloor heating include supply manifold and return manifold, each with two 1/2" outlet connections with female threads for air vents and fill/drain valves. The manifold is assembled in noise reducing brackets. Delivered in a box with stickers.



L = Length of manifold n = Number of circuits