


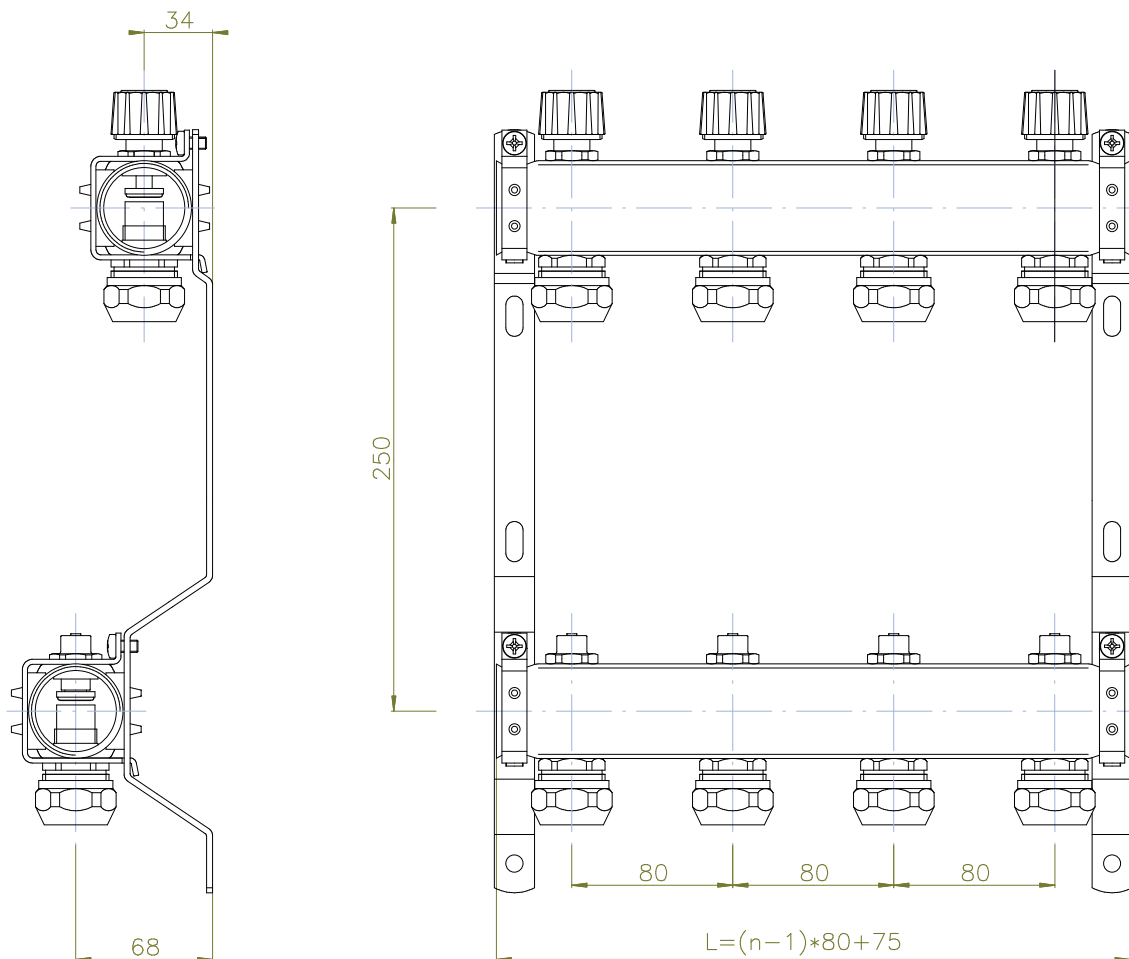
# Large area manifold XL-FBi

with integrated valves



Specifications		Circuits	Type	Length	Item No.
 <p><b>Manifold:</b> Stainless steel AISI 304</p> <p><b>Dimension:</b> DN50 stainless steel profile, 1760 mm<sup>2</sup> cross-sectional area</p> <p><b>Connections:</b> 1 1/4" female threads on both sides</p> <p><b>Supply:</b> Integrated regulating and shut-off fitting</p> <p><b>Return:</b> Integrated control valves with pre-setting</p> <ul style="list-style-type: none"> <li>• M30x1.5 mm threads</li> <li>• with handwheel</li> <li>• ready for electrothermic actuators</li> <li>• Kvs 3.9</li> </ul> <p><b>Connections:</b> Compression couplings 25x2.3mm, center distance 80 mm</p> <p><b>Pressure stage/ system:</b> PN6 for heating systems with water quality according to VDI 2035</p>		2	XL-FBi 2	155 mm	3302
		3	XL-FBi 3	235 mm	3303
		4	XL-FBi 4	315 mm	3304
		5	XL-FBi 5	395 mm	3305
		6	XL-FBi 6	475 mm	3306
		7	XL-FBi 7	555 mm	3307
		8	XL-FBi 8	635 mm	3308
		9	XL-FBi 9	715 mm	3309
		10	XL-FBi 10	795 mm	3310
		11	XL-FBi 11	875 mm	3311
		12	XL-FBi 12	955 mm	3312
		13	XL-FBi 13	1035 mm	3313
		14	XL-FBi 14	1115 mm	3314

**Delivery:** Stainless steel manifold packages include supply manifold and return manifold. For use in combination with pipes size 25x2.3 mm. Delivered in a box with noise reducing brackets and stickers.



L = Length of manifold n = Number of circuits