


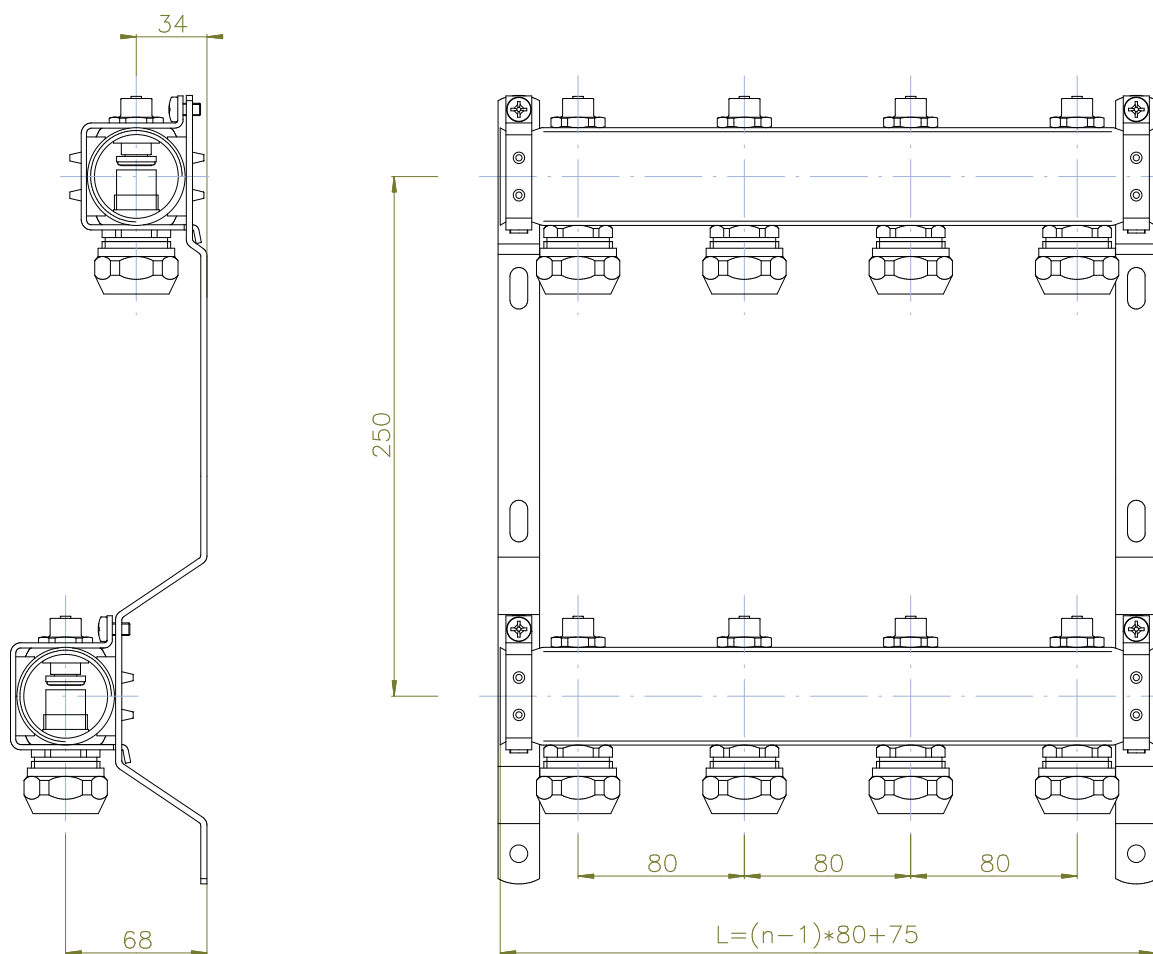
Large area manifold XL-HKi

with integrated regulating fitting



Specifications		Circuits	Type	Length	Item No.
 <p>Manifold: Stainless steel AISI 304</p> <p>Dimension: DN50 stainless steel profile, 1760 mm² cross-sectional area</p> <p>Connections: 1¼" female threads on both sides</p> <p>Supply: Integrated regulating and shut-off fitting</p> <p>Return: Integrated regulating and shut-off fitting</p> <p>Connections: Compression couplings 25x2.3mm, center distance 80 mm</p> <p>Pressure stage/ system: PN6 for heating systems with water quality according to VDI 2035</p>		2	XL-HKi 2	155 mm	2402
		3	XL-HKi 3	235 mm	2403
		4	XL-HKi 4	315 mm	2404
		5	XL-HKi 5	395 mm	2405
		6	XL-HKi 6	475 mm	2406
		7	XL-HKi 7	555 mm	2407
		8	XL-HKi 8	635 mm	2408
		9	XL-HKi 9	715 mm	2409
		10	XL-HKi 10	795 mm	2410
		11	XL-HKi 11	875 mm	2411
		12	XL-HKi 12	955 mm	2412
		13	XL-HKi 13	1035 mm	2413
		14	XL-HKi 14	1115 mm	2414

Delivery: Stainless steel manifold packages include supply manifold and return manifold. For use in combination with pipes size 25x2.3 mm. Delivered in a box with noise reducing brackets and stickers.



L = Length of manifold n = Number of circuits